weisstechnik



datasheet_headline_highlights

-
-
-
-
-

datasheet_headline_technical-data

테스트 공간 용적 [l]	580
테스트 공간 치수 (HxWxD) (mm)	1250 x 710 x 655
:infoObject:productData: %Basisbrick%:testSpace_materialTestSpaceHousing [Basisbrick:testSpace_materialTestSpaceHousing]	Stainless steel, 1.4301, surface III D glossy
외부 치수 (mm)	2130 x 1025 x 1400
:infoObject:productData:%Basisbrick%:externalHousing_material [Basisbrick:externalHousing_material]	Galvanised sheet steel
:infoObject:productData:%Basisbrick%:testSpace_doorDimensions [Basisbrick:testSpace_doorDimensions]	1 x 1
:infoObject:productData:%Basisbrick%:loadingandWeight_totalWeight [Basisbrick:loadingandWeight_totalWeight] [kg]	475
:infoObject:productData:%Basisbrick%:loadingandWeight_totalLoad [Basisbrick:loadingandWeight_totalLoad] [kg]	160
:infoObject:productData: %Basisbrick%:loadingandWeight_totalLoadPerInsertBasket [Basisbrick:loadingandWeight_totalLoadPerInsertBasket] [kg]	20
:infoObject:productData: %Basisbrick%:loadingandWeight_totalLoadOfTheInsertBaskets [Basisbrick:loadingandWeight_totalLoadOfTheInsertBaskets] [kg]	100
:infoObject:productData:%Basisbrick%:accessPort_right [Basisbrick:accessPort_right]	1 piece, approx. ø 80 mm stainless steel incl. closed silicone plug + slotted foam silicone plug
:infoObject:productData:%Basisbrick%:electricalConnection_connection [Basisbrick:electricalConnection_connection]	CEE-Connector, 16 A
:infoObject:productData: %Basisbrick%:electricalConnection_connectionCable [Basisbrick:electricalConnection_connectionCable]	3,5m cable
:infoObject:productData:%Basisbrick%:electricalConnection_powerRating [Basisbrick:electricalConnection_powerRating] [kW]	4.8
:infoObject:productData:%Basisbrick%:electricalConnection_currentRating [Basisbrick:electricalConnection_currentRating] [A]	12

Weiss Technik GmbH
info@weiss-technik.com
weiss-technik.com


음압 레벨 (db(A)) [dB(A)]	49
:infoObject:productData:%BasisbrickII%:refrigerant [BasisbrickII:refrigerant]	R744
:infoObject:productData:%Temperature%:temperatureRange [Temperature:temperatureRange]	-50 ... 130
:infoObject:productData:%Temperature%:perfData_condenser_cooling [Temperature:perfData_condenser_cooling]	air-cooled
:infoObject:productData: %Temperature%:perfDataTemperature_tempHomogeneity [Temperature:perfDataTemperature_tempHomogeneity]	0.5 ... 1.5
:infoObject:productData: %Temperature%:perfDataTemperature_tempDeviationTime [Temperature:perfDataTemperature_tempDeviationTime]	0.2 ... 0.5
온도변화율; 가열 (공냉식) [K/min]	4.5
온도변화율; 냉각 (공냉식) [K/min]	3.5
:infoObject:productData: %Temperature%:maxHeatCompensation20C_airCooled [Temperature:maxHeatCompensation20C_airCooled] [W]	2500


datasheet_headline_options

datasheet_tablehead_label	datasheet_tablehead_des
선반, 최대 하중 100kg	고객이 준비한 시험 설비와 시험 대상물을 설치하기 위한 강화형 스테인리스 스틸 선반입니다. 최대 하중은 100kg의 면하중입니다. 이 선반은 언제든지 장착 및 탈거가 가능합니다.
온도 변화율 증가	추가 난방 장치를 설치하면 난방 운전 시 온도 변화 속도가 6 K/min으로 증가합니다.
	장비의 개조를 통해 기후 시험 주행을 수행할 수 있습니다. 제어는 정전용량식 측정 시스템을 통해 이루어집니다.
시험편 온도 측정	테스트 룸 내 혹은 시험편의 어느 지점에서나 온도를 측정할 수 있도록 유연한 케이블이 장착된 이동형 온도 센서 Pt 100이 갖춰져 있습니다. 측정된 값은 제어 패널에 °C로 표시되며, 인터페이스나 측정값 카드의 아날로그 출력을 통해 불러올 수 있습니다.
시험편 온도 측정	새로운 버전의 IEC 60068-2-14 Nb를 포함한 다수의 규격에서는 시험 단계 동안 시험편의 온도를 면밀히 관찰하고 기록할 것을 요구합니다. 당사의 시험 챔버에는 추가 온도 센서를 장착할 수 있고, 측정값은 디스플레이에 표시되고 기록됩니다(USB 또는 S!MPATI® 활용). 필요에 따라 센서 중 하나를 제어용 센서로 사용할 수도 있습니다.


Weiss Technik GmbH
info@weiss-technik.com
weiss-technik.com

datasheet_headline_diagrams

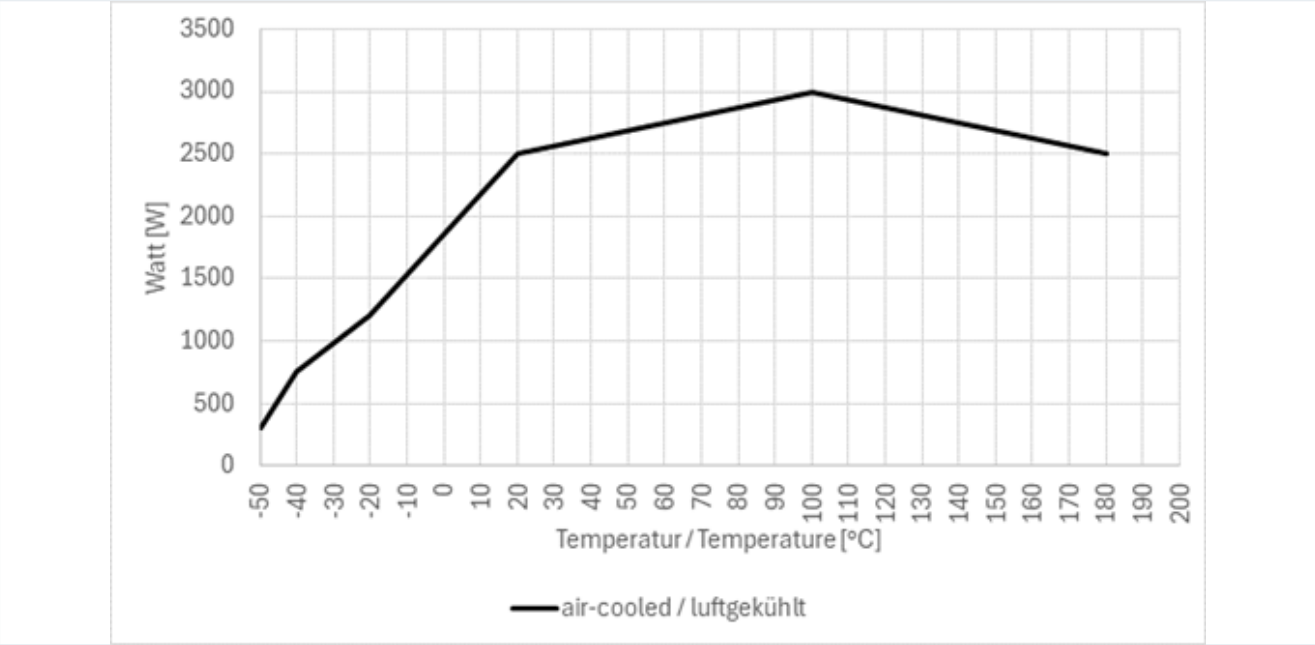

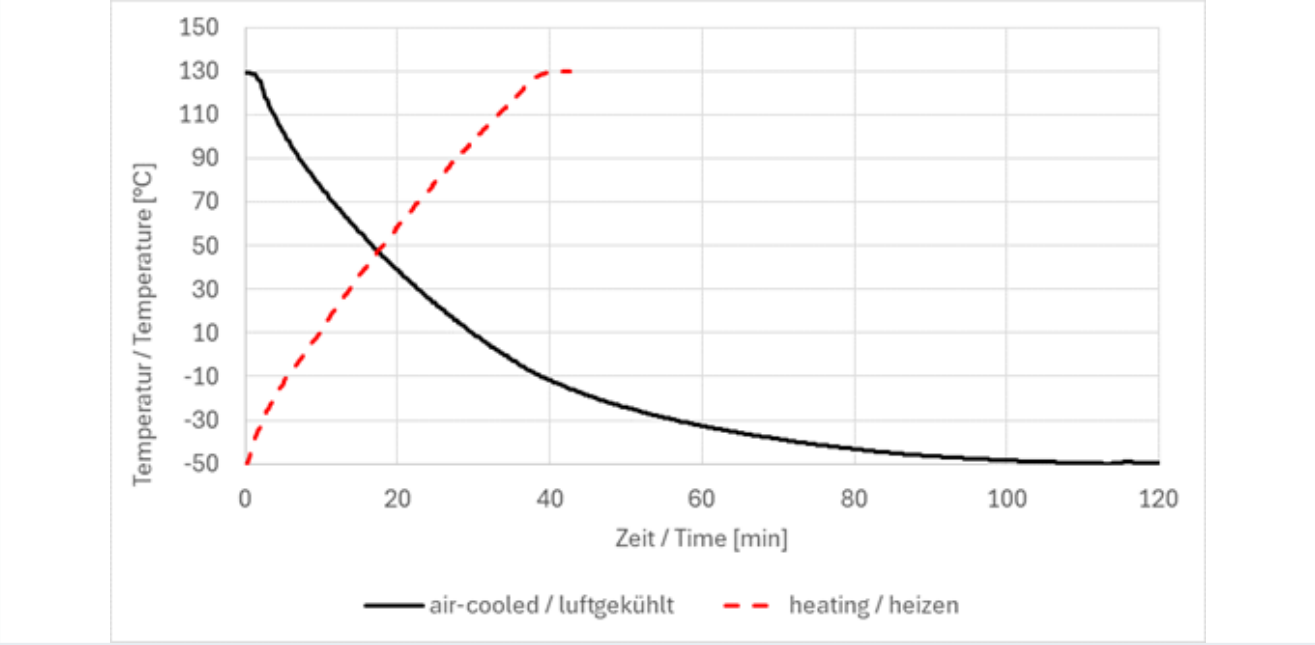



Weiss Technik GmbH
info@weiss-technik.com
weiss-technik.com

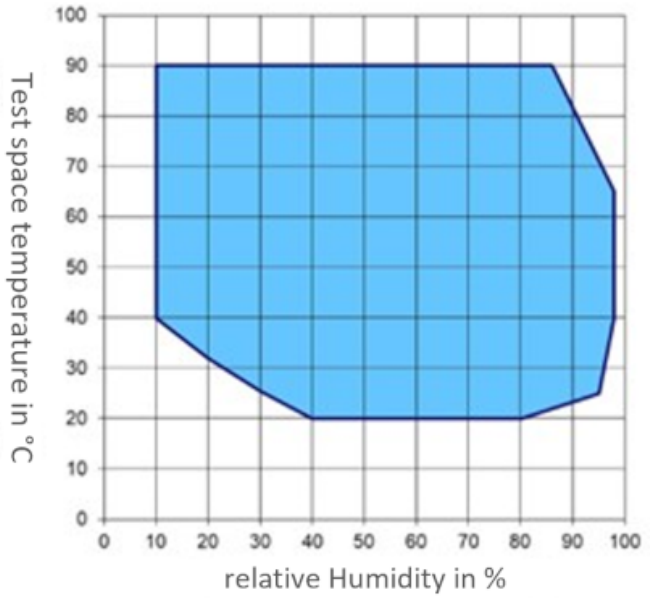



Weiss Technik GmbH
info@weiss-technik.com
weiss-technik.com


datasheet_headline_technicalDrawings

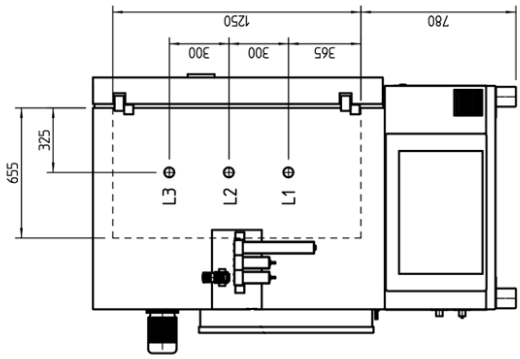

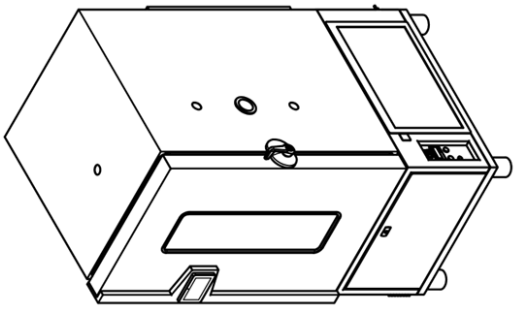

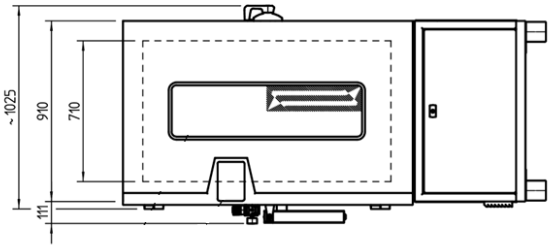

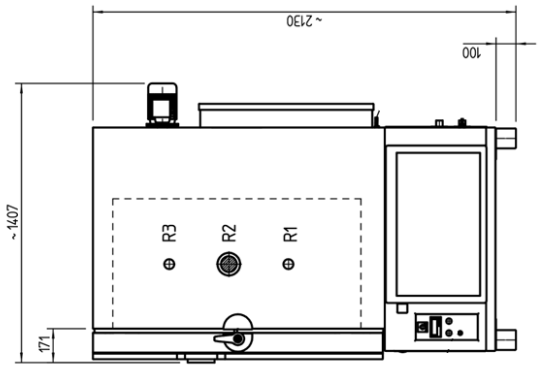

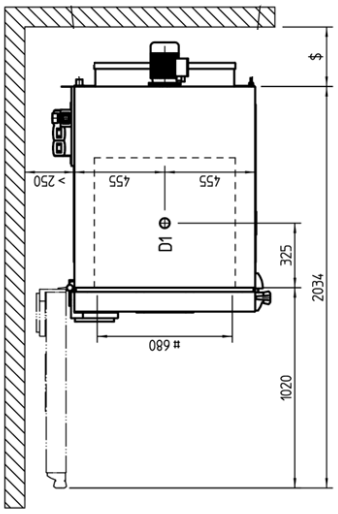

Weiss Technik GmbH
info@weiss-technik.com
weiss-technik.com